

ultimax

Pressure assisted toilet

- **Most efficient flushing system - 2,4 litres/flush.***
- **Installation of an in-wall tank is not necessary.**
- **Adjustable water volume – 2,4 - 4 l.**
- **Quiet operation – low flushing noise.**
- **Quick and easy installation.**
- **Tested for 200,000 cycles.**
- **CE certified – compliant with EN997.**
- **No electricity required.**
- **Including toilet seat and installation set.**


PATENT
PROTECTED

** except for toilets that flush with the help of an electric pump*




OFS Ultimax

Technical parameters

- **Toilet type:** freestanding
- **Flush type:** hybrid
- **Design type:** all in one
- **Waste type:** rear (φ102mm)
- **Flush circuit:** open
- **Number of flushing nozzles:** 2
- **Fixing:** to the back wall / hidden fixing
- **Fixing kit:** part of the application
- **Toilet seat:** component with soft-close function
- **Service hole:** accessible after removing the plate
- **Water supply location:** right side, left side, behind the toilet

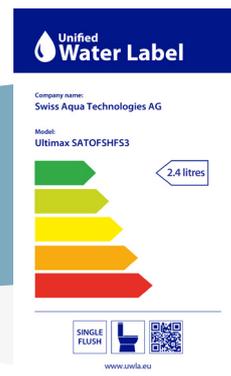

- **Connection method:** flexible hose G1/2 (female) - not included in the package
- **Cold water connection**
- **Minimum water supply pressure:** 2.2 bar (0.22 Mpa)
- **Flush volume:** adjustable +/- (2.4 - 4 liters)
- **Triggering the flush:** with a button integrated into the ceramic - the button needs to be held for a while, it is not enough to just press it
- **Adjusting the flushing volume:** with a rotary control (adjuster) integrated into the ceramic

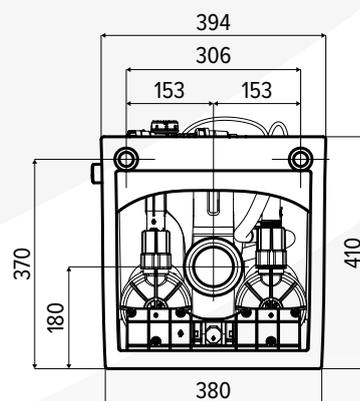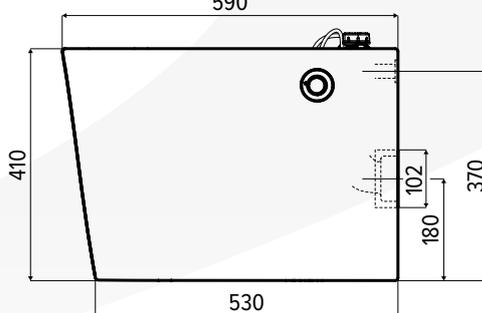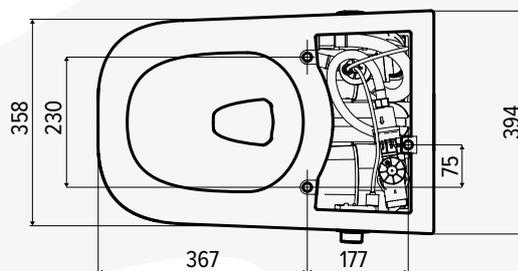

Model	Connection	Diameter (mm)	Length (mm)	Height (mm)	Weight (kg)
SATOFSHFS3	G 1/2" (female)	394	590	410	48